

CLICK I/O Module Specifications


C0-08TD2



8-Point Sourcing DC Output Module


8-pt 12-24 VDC current sourcing output module,
1 common, 0.3 A/pt, removable terminal block included
(replacement ADC p/n C0-08TB).

Wiring Diagram

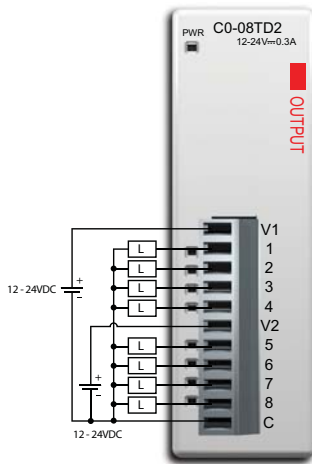


C0-08TD2 Output Specifications	
Outputs per Module	8 (Source)
Operating Voltage Range	12-24 VDC
Output Voltage Range	9.6-30 VDC
Maximum Output Current	0.3 A/point, 1.2 A/common
Minimum Output Current	0.5 mA
Maximum Leakage Current	0.1 mA @ 30.0 VDC
On Voltage Drop	1.5 VDC @ 0.3 A
Maximum Inrush Current	1 A for 10 ms
OFF to ON Response	< 1 ms
ON to OFF Response	< 1 ms
Status Indicators	Logic Side (8 points, red LED) Power Indicator (green LED)
Commons	1 (8 points/common)
Bus Power Required (24 VDC)	Max. 50 mA (All Outputs On)
Terminal Block Replacement	ADC p/n C0-8TB
Weight	2.8 oz (80 g)

Equivalent Output Circuit

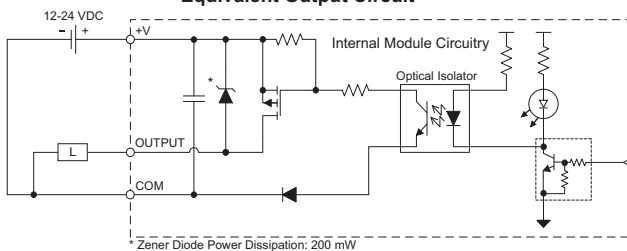

Output Module Temperature Derating Chart

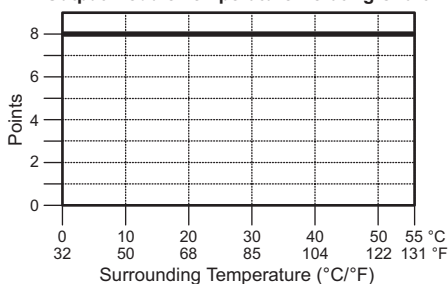

ZipLink Pre-Wired PLC Connection Cables and Modules



ZL-RTB20 20-pin feed-through connector module



11-pin connector cable
ZL-C0-CBL11 (0.5 m length)
ZL-C0-CBL11-1 (1.0 m length)
ZL-C0-CBL11-2 (2.0 m length)

Power Budgeting

Power Budgeting

There are two areas to be considered when determining the power required to operate a CLICK PLC system. The first area is the power required by the CLICK CPU, along with the internal logic side power that the CPU provides to its own I/O and any connected I/O modules that are powered through the CPU's expansion port; plus any device, such as a C-more Micro-Graphic panel, that is powered through one of the CPU's communication ports.

The second area is the power required by all externally connected I/O devices. This should be viewed as the field side power required. The field side power is dependent on the voltage used for a particular input or output device as it relates to the wired I/O point, and the calculated load rating of the connected device.

It is strongly recommended that the power source for the logic side be separate from the power source for the field side to help eliminate possible electrical noise.

Power budgeting requires the calculation of the total current that the 24 VDC power source needs to provide to CLICK's logic side, and also a separate calculation of the total current required for all devices operating from the field side of the PLC system.

See the Power Budgeting Example shown to the right. The table shows current requirements for a CLICK CPU, two I/O modules, and a C-more Micro. Use the total amperage values to select a proper sized power supply.

Power Budgeting Using the CLICK Programming Software

The following example shows the logic side current consumption as calculated in the CLICK Programming software. Based on the amperage rating of the power supply selected in the first column, your power budget is calculated by subtracting each consecutive module's power consumption from the total available power budget. If you exceed the maximum allowable power consumption the power budget row is highlighted in red.

Power budget row turns red if maximum allowable power consumption is exceeded for the power supply selected.



CLICK 24 VDC Power Supply
CO-00AC or CO-01AC





Other 24 VDC Power Supply
Example: PSP24-60S

Current Consumption (mA)		
Part Number	Power Budget 24 VDC (logic side)	External 24 VDC (field side)
Input Modules		
CO-08ND3	30	0
CO-08ND3-1	30	0
CO-16ND3	40	0
CO-08NE3	30	0
CO-16NE3	40	0
CO-08NA	30	0
Output Modules		
CO-08TD1	50	15
CO-08TD2	50	0
CO-16TD1	80	100
CO-16TD2	80	0
CO-08TA	80	0
CO-04TRS	100	0
CO-08TR	100	0
C-more Micro-Graphic Panel (Monochrome models only)		
All p/n	90	0

Power Budgeting Example

Current Consumption (mA) Example		
Part Number	Power Budget 24 VDC (logic side)	External 24 VDC (field side)
CO-00DD1-D	120	60
CO-16ND3	40	0
CO-16TD1	80	100
C-more Micro	90	0
Total:	330	160 *

* Plus calculated load of connected I/O devices.

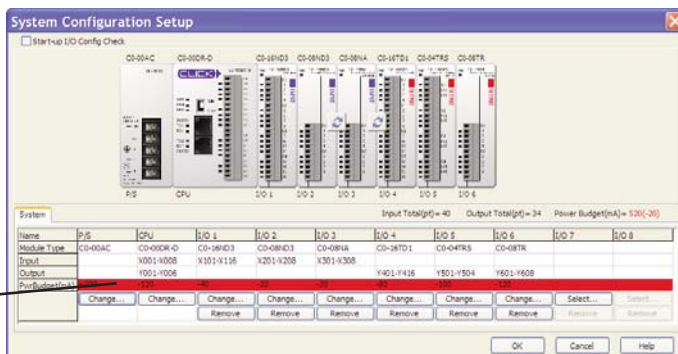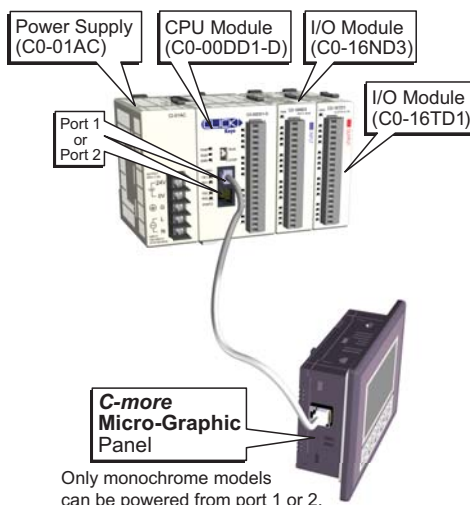


Choosing the I/O Type

Analog CPU Modules

The Analog CLICK CPU modules are available with different combinations of DC in, DC sinking, sourcing or relay out, and analog in and out.

They also have an RS-485 port for Modbus and ASCII communications, and the battery backup feature which will retain the data in SRAM for 5 years (battery sold separately; part no. D2-BAT-1).

The table lists the part numbers showing the various I/O type combinations.

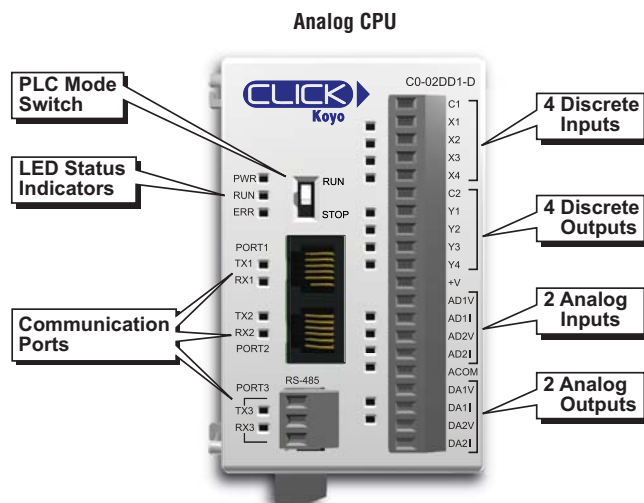

Analog CLICK CPUs					
Part Number	Discrete Input Types	Discrete Output Types	Analog Input Types	Analog Output Types	External Power
C0-02DD1-D	4 DC (sink/source)	4 DC (sink)	2 channel; voltage (0-5 VDC) / current (4-20 mA); selectable separately per channel	2 channel; voltage (0-5 VDC) / current (4-20 mA); selectable separately per channel	24 VDC (required for all CPUs)
C0-02DD2-D		4 DC (source)			
C0-02DR-D		4 relay			

Discrete I/O Modules

A variety of I/O modules are available for the CLICK PLC system. Up to 8 I/O modules can be connected to a CLICK CPU module to expand the system I/O count and meet the needs of a specific application. Complete I/O module specifications and wiring diagrams can be found later in this section.

Input Modules


Discrete Input I/O Modules					
Part Number	I/O Type	I/O Number	I/O Commons	Sink or Source	Voltage Ratings
C0-08ND3	DC	8	2	Sink or Source	12-24 VDC
C0-08ND3-1	DC	8	2	Sink or Source	3.3-5 VDC
C0-16ND3	DC	16	4	Sink or Source	24 VDC
C0-08NE3	AC/DC	8	2	Sink or Source	24 VAC/VDC
C0-16NE3	AC/DC	16	4	Sink or Source	24 VAC/VDC
C0-08NA	AC	8	2	N/A	100-120 VAC



C0-08ND3




C0-08ND3-1



C0-16ND3



C0-08NE3



C0-16NE3




C0-08NA

Choosing the I/O Type / Specifications

Discrete I/O Modules (continued)

Output Modules

Discrete Output I/O Modules					
Part Number	I/O Type	I/O Number	I/O Commons	Sink or Source	Voltage/Current Ratings
C0-08TD1	DC	8	2	Sink	3.3-27 VDC, 0.3 A
C0-08TD2	DC	8	1	Source	12-24 VDC, 0.3 A
C0-16TD1	DC	16	2	Sink	5-27 VDC, 0.1 A
C0-16TD2	DC	16	2	Source	12-24 VDC, 0.1 A
C0-08TA	AC	8	2	N/A	17-240 VAC, 0.3 A
C0-04TRS	Relay	4	4	N/A	6-27 VDC, 7 A 6-240 VAC, 7 A
C0-08TR	Relay	8	2	N/A	6-27 VDC, 1 A 6-240 VAC, 1 A

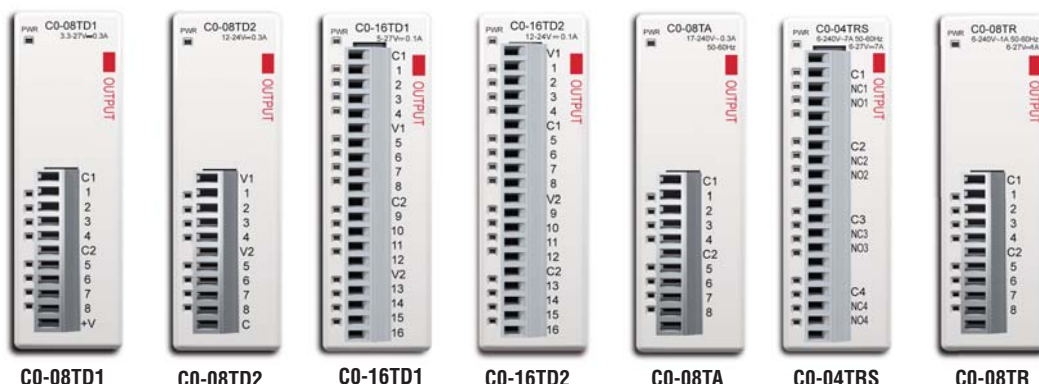

General Specifications For All CLICK PLC Products

These general specifications apply to all CLICK CPUs, optional I/O modules, and optional power supply products. Please refer to the appropriate I/O temperature derating charts under both the CPU and I/O module specifications to determine best operating conditions based on the ambient temperature of your particular application.

General Specifications	
Power Input Voltage Range	20-28 VDC
Maximum Power Consumption	5 W (No 5 V use from communication port)
Maximum Inrush Current	30 A (less than 1ms)
Acceptable External Power Drop	Max 10 ms
Operating Temperature	32°F to 131°F (0°C to 55°C), IEC 60068-2-14 (Test Nb, Thermal Shock)
Storage Temperature	-4°F to 158°F (-20°C to 70°C) IEC 60068-2-1 (Test Ab, Cold) IEC 60068-2-2 (Test Bb, Dry Heat) IEC 60068-2-14 (Test Na, Thermal Shock)
Ambient Humidity	30% to 95% relative humidity (non-condensing)
Environmental Air	No corrosive gases. Environmental pollution level is 2 (UL840)
Vibration	MIL STD 810C, Method 514.2, EC60068-2-6 JIS C60068-2-6 (Sine wave vibration test)
Shock	MIL STD 810C, Method 516.2, IEC60068-2-27, JIS C60068-2-27
Noise Immunity	Comply with NEMA ICS3-304, Impulse noise 1μs, 1000V EN61000-4-2 (ESD), EN61000-4-3 (RFI), EN61000-4-4 (FTB) EN61000-4-5 (Surge), EN61000-4-6 (Conducted) EN61000-4-8 (Power frequency magnetic field immunity) RFI: No interference measured at 150 and 450 MHz (5w/15cm)
Emissions	EN55011:1998 Class A
Agency Approvals	UL508 (File No. E157382, E316037); CE (EN61131-2)
Other	RoHS

Cut your PLC wiring time down to minutes instead of hours

The ZIPLink wiring system eliminates the normally tedious process of wiring PLC I/O to terminal blocks. Simply plug one end of a ZIPLink pre-wired terminal block cable into your CLICK module and the other end into a ZIPLink connector module. It's that easy. ZIPLinks use half the space, at a fraction of the total cost of terminal blocks.

ZIPLinks are available in a variety of styles to suit your needs, including feedthrough connector module. ZIPLinks are available for all Basic and Standard CLICK CPU modules and all discrete input and output modules.

Specify your ZIPLink system

Use the Compatibility Matrix table below:



NOTE: ZIPLINKS ARE ONLY AVAILABLE FOR BASIC AND STANDARD CPU MODULES; THEY ARE NOT AVAILABLE FOR ANALOG CPU MODULES.

Step 1	Locate the CLICK CPU module or I/O module part number.
Step 2	Locate compatible connector module type.
Step 3	Select the cable length by replacing the # symbol with: Blank = 0.5m, -1 = 1.0m, -2 = 2.0m

ZIPLink Wiring System Compatibility Matrix for CLICK PLCs					
Step 2: Connector Module Type		Feedthrough Module	Fuse Module	Relay Modules	Sensor Input Module
Step 1: I/O unit	Number of Terminals	Step 3: Cables			
CPU Module	C0-00DD1-D	20	ZL-C0-CBL20#		
	C0-00DD2-D	20	ZL-C0-CBL20#		
	C0-00DR-D	20	ZL-C0-CBL20#		
	C0-00AR-D	20	ZL-C0-CBL20#		
	C0-01DD1-D	20	ZL-C0-CBL20#		
	C0-01DD2-D	20	ZL-C0-CBL20#		
	C0-01DR-D	20	ZL-C0-CBL20#		
	C0-01AR-D	20	ZL-C0-CBL20#		
I/O Module	Inputs				
	C0-08ND3	11	ZL-C0-CBL11#		
	C0-08ND3-1	11	ZL-C0-CBL11#		
	C0-08NE3	11	ZL-C0-CBL11#		
	C0-08NA	11	ZL-C0-CBL11#		
	C0-16ND3	20	ZL-C0-CBL20#		ZL-C0-CBL20#
	C0-16NE3	20	ZL-C0-CBL20#		ZL-C0-CBL20#
	Outputs				
	C0-08TD1	11	ZL-C0-CBL11#		
	C0-08TD2	11	ZL-C0-CBL11#		
	C0-08TR	11	ZL-C0-CBL11#		
	C0-08TA	11	ZL-C0-CBL11#		
	C0-16TD1	20	ZL-C0-CBL20#	ZL-C0-CBL20#	ZL-C0-CBL20#
	C0-16TD2	20	ZL-C0-CBL20#	ZL-C0-CBL20#	
	C0-04TRS*	20	ZL-C0-CBL20#		

*Note: The C0-04TRS relay output is derated not to exceed 2 Amps per point max. when used with the ZIPLink wiring system

ZIPLink Connector Modules and Cable specifications bfound in Terminal Blocks and Wiring section

