

D2-230/240 Key Features



D2-240:

The D2-240 provides a subset of the D2-250-1's capabilities. If you need a good CPU with multiple communications ports, and complex math or PID isn't required, then the D2-240 is the CPU for you!

Built-in memory

There is 2.5K of EEPROM program memory in the D2-240. No additional memory is required.

If you have critical data stored in the capacitor backed V-memory, simply purchase the optional lithium battery (D2-BAT) to permanently maintain these parameters as well.

Powerful instructions

The D2-240 instructions cover most of the capability of our more powerful D2-250-1, and allow you to cover a wide variety of applications. Instructions include Boolean logic, data manipulation, integer math, interrupts, subroutines, FOR/NEXT loops, etc. For a complete list of instructions, see the back of this section.

Two built-in RS-232 communications ports


The D2-240 offers two communication ports. The top port can be used for a direct connection to a personal computer for programming, to our handheld

programmer, **C-more**, or to the DV-1000. The bottom port is a slave-only port and supports our **DirectNET™** or K-sequence protocol at speeds up to 19.2 Kbaud. If you're using an operator interface or if you plan on connecting the system to a network later on, then you can choose the D2-240. The D2-240 also supports the D2-DCM Data Communication Module and the H2-EKOM Ethernet Communication Modules.

DL205 spare EEPROM chips

There may be cases where you want to have a spare EEPROM chip available. For example, maybe you need to upgrade a customer's machine with your latest enhancements. You can purchase extra EEPROM chips (two per pack). These can be installed in the CPU (D2-230/D2-240 only) and programmed, or they can be programmed directly with the DL205 handheld programmer.

CPU Side View

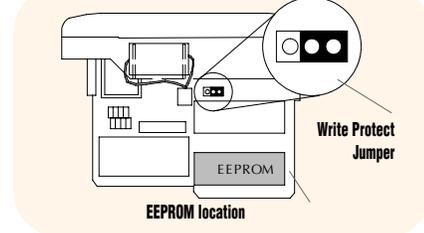

	D2-EE-1	D2-EE-2
CPU	D2-230	D2-240
CPU Program Storage Capacity	2.0K	2.4K
Writing Cycle Life	10,000	10,000
Write Inhibit	CPU jumper	CPU jumper
Memory Clear Method	Electrical	Electrical



D2-230: our lowest price DL205 CPU

The D2-230 is our most economical CPU in the DL205 product family. If you are looking at the DL205 primarily because of the size, or for other reasons that don't require lots of CPU horsepower, then give the D2-230 a try.

Built-in EEPROM memory

There is 2.0K of EEPROM program memory in the D2-230. No additional memory is required.

If you have critical data stored in the capacitor-backed V-memory, simply purchase the optional lithium battery (D2-BAT) to permanently maintain these parameters as well.

One built-in communications port

The D2-230 has only one communication port. If you are considering any network connections in the future, you will need the D2-240, D2-250-1 or D2-260 CPU. The extra port may be worth the cost, especially during machine startup or troubleshooting sessions. The D2-230 does not support the Ethernet or Data Communications modules.

Basic instruction set

The D2-230 provides a subset of the D2-240's well-rounded instructions. The D2-230's instructions cover basic Boolean and simple integer math.


Automation Direct

- PLC Overview
- DL05/06 PLC
- DL105 PLC
- DL205 PLC**
- DL305 PLC
- DL405 PLC
- Field I/O
- Software
- C-more HMIs
- Other HMI
- AC Drives
- Motors
- Steppers/Servos
- Motor Controls
- Proximity Sensors
- Photo Sensors
- Limit Switches
- Encoders
- Pushbuttons/Lights
- Process
- Relays/Timers
- Comm.
- TB's & Wiring
- Power
- Enclosures
- Appendix
- Part Index



D2-230/240 Key Features

The diagram to the right shows the various hardware features found on the D2-230 and D2-240 CPUs.

CPU Status Indicators		
RUN	ON	CPU is in RUN mode
	OFF	CPU is in PROGRAM mode
BATT	ON	Battery backup voltage is low
	OFF	Battery backup voltage is OK or disabled
CPU	ON	CPU internal diagnostics detects error
	OFF	CPU is OK
PWR	ON	CPU power good
	OFF	CPU power failure
Mode Switch (D2-240 only)		
RUN		Puts CPU into RUN mode
TERM		Allows peripherals (HPP, <i>DirectSOFT</i>) to select the mode of operation
Port 1		
Protocols	K-sequence slave	
Devices	Can connect w/HPP, <i>DirectSOFT</i> ™, <i>C-more</i> , DV-1000	
Specs.	6P6C phone jack connector RS-232 9,600 baud Fixed address Odd parity only 8 data bits, one start, one stop asynchronous, half-duplex, DTE	
Port 2 (D2-240 only)		
Protocols	K-sequence slave, <i>DirectNET</i> slave	
Devices	Can connect w/many devices, such as PCs running <i>DirectSOFT</i> , DSData, HMI packages, <i>C-more</i> , DV-1000, or any <i>DirectNET</i> master	
Specs.	6P6C phone jack connector 300/600/1200/2400/4800 9600/19.2k baud Odd or no parity Selectable address (1-90, HEX 1 – 5A) 8 data bits, one start, one stop Asynchronous, Half-duplex, DTE	
Battery (Optional)		
D2-BAT	CR14250SE	
Note: Batteries are not needed for program back-up. However, you should order a battery if you have parameters in V-memory that must be maintained in case of a power outage.		

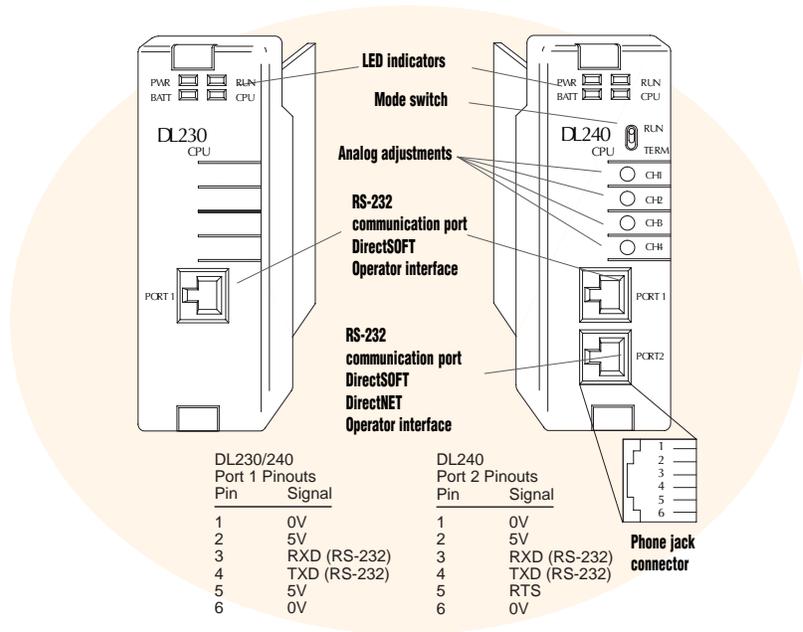

CPU side view

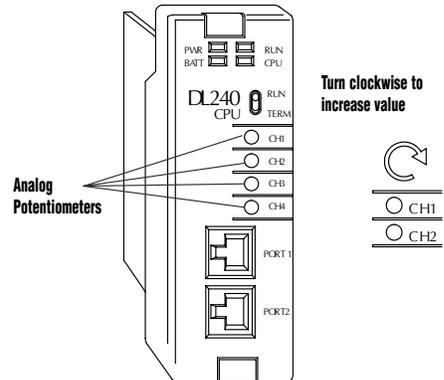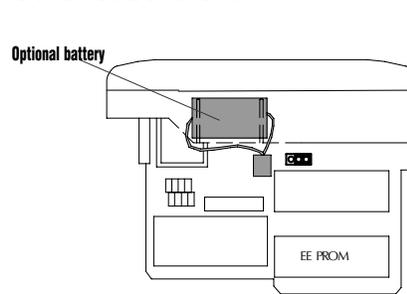

Four external potentiometers for adjustments

There are four potentiometers on the face plate of the D2-240 CPU. They have a resolution of 256 steps and can be used to externally adjust four predefined V-memory locations inside the D2-240 CPU. You specify upper and lower limits for the values and the CPU takes care of the rest!