


AC Input Modules

D2-16NA AC Input	
Inputs per Module	16
Commons per Module	2 (isolated)
Input Voltage Range	80-132 VAC
Peak Voltage	132 VAC
ON Voltage Level	70 VAC minimum
OFF Voltage Level	20 VAC maximum
AC Frequency	47-63 Hz
Input Impedance	12 kΩ @ 60 Hz
Input Current	11 mA @ 100 VAC, 50 Hz 13 mA @ 100 VAC, 60 Hz 15 mA @ 132 VAC, 60 Hz
Minimum ON Current	5mA
Maximum OFF Current	2mA
Base Power Required 5VDC	100 mA
OFF to ON Response	5 to 30 ms
ON to OFF Response	10 to 50 ms
Terminal Type (included)	Removable; D2-16IOCON
Status Indicator	Logic side
Weight	2.4 oz. (68g)



See the Terminal Blocks and Wiring section for part numbers of ZIPLink cables and terminal blocks compatible with this module.

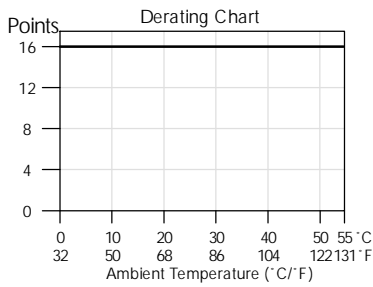